



# LMDL-830

## Recessed Downlight

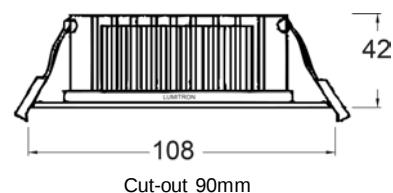

|                          |                |                           |            |          |                        |
|--------------------------|----------------|---------------------------|------------|----------|------------------------|
| Aluminium and PC<br>Body | 100-240<br>VAC | 0.89-0.92<br>Power Factor | CRI<br>>80 | Dimmable | 90°                    |
|                          |                | RoHS                      |            |          | ENERGY SAVING LIGHTING |


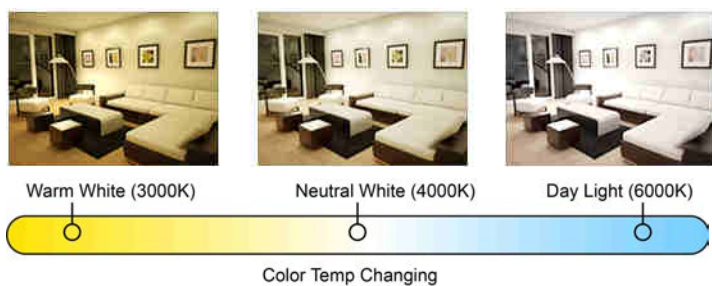


### Specifications

- Material: Aluminium and PC
- Housing Color: ☐ White ☐ Silver ☐ Brushed Chrome ☐ Shiny Chrome
- Input Voltage: AC100-240V
- Power Factor: 0.89-0.92
- Efficiency: 72~80 lumen per Watt
- Color Temp: 3000K/4000K/5000K/6000K
- CCT Change Compatible with Home Switch
- Dimmable



### Option: Color Temperature Change Control

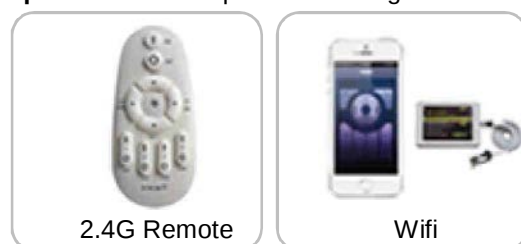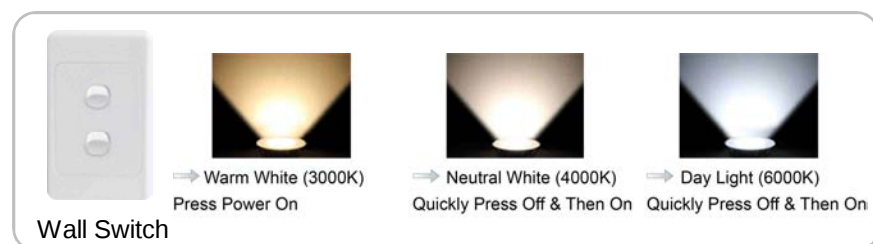

| REF.            | Wattage | Lumens    | Voltage    | CRI | Beam Angle | Color Temp  |
|-----------------|---------|-----------|------------|-----|------------|-------------|
| LMDL-830-LED10W | 10W     | 720~800lm | 100-240VAC | >80 | 90°        | 3000K~6000K |
| LMDL-830-LED12W | 12W     | 864~960lm | 100-240VAC | >80 | 90°        | 3000K~6000K |