

MASTER PL-T 4P



MASTER PL-T 4P

Product Description

- Energy-saving compact fluorescent lamps
- Compact long-arc low-pressure mercury discharge lamp
- Envelope consists of six parallel narrow fluorescent tubes

Product Features

- 4-pin base without glow switch starter and capacitor
- Fast light run-up under all circumstances
- Philips invented bridge technology applied
- Dimming is possible

Product Benefits


- Optimal light performance for short or long operation per switch-on
- Substantially more light (about 15% more) per light point than with other similar shapes
- Long life and sustainable light output

Application

- Designed for general or supplementary lighting in professional and semi-professional environments
- Ideal for use in recessed or surface mounted down lighters, wall units, outdoor lighting
- First choice for short switching cycles, emergency lighting and deep dimming

System

- For use with HF electronic gear enabling controllable light output and high independence of mains supply variations

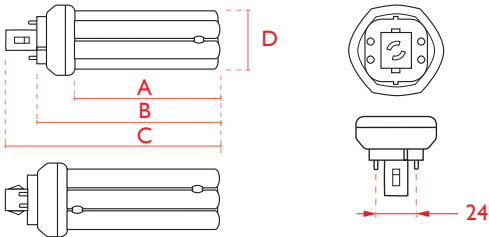

Dimensions in mm

Product ID	Base face to base face (A)	Insertion length (B)	Overall length (C)	Diameter D
13W	66.7	91	106.7	41
18W	71.7	96	111.7	41
26W	86.7	111	126.7	41
32W	98.7	123	138.7	41
42W	120.7	145	160.7	41
57W	157.7	182	197.7	41

Technical Specifications

Product ID	Rated Lamp Wattage (W)	Cap Base	Cap Base Information	Color Temperature (K)	Color Rendering Index (Ra)	Luminous Flux Lamp EL (lm)	Life to 50% Failures Preheat EL (hrs)	Life to 50% Failures Non-preheat EL (hrs)	Nett Weight Product in Grams (gr)	Comm Code
PL-T 13W/827/4P 1CT	13	GX24q-1	4P	2700	82	900	13000	7000	56	PLT13W8274PM
PL-T 13W/830/4P 1CT	13	GX24q-1	4P	3000	82	900	13000	7000	56	PLT13W8304PM
PL-T 13W/840/4P 1CT	13	GX24q-1	4P	4000	82	900	13000	7000	56	PLT13W8404PM
PL-T 18W/827/4P 1CT	18	GX24q-2	4P	2700	82	1200	13000	7000	58	PLT18W8274PM
PL-T 18W/830/4P 1CT	18	GX24q-2	4P	3000	82	1200	13000	7000	58	PLT18W8304PM
PL-T 18W/840/4P 1CT	18	GX24q-2	4P	4000	82	1200	13000	7000	58	PLT18W8404PM
PL-T 26W/827/4P 1CT	26	GX24q-3	4P	2700	82	1800	13000	7000	58	PLT26W8274PM
PL-T 26W/830/4P 1CT	26	GX24q-3	4P	3000	82	1800	13000	7000	64	PLT26W8304PM
PL-T 26W/840/4P 1CT	26	GX24q-3	4P	4000	82	1800	13000	7000	64	PLT26W8404PM
PL-T 32W/827/4P 1CT	32	GX24q-3	4P	2700	82	2400	13000	7000	64	PLT32W8274PM
PL-T 32W/830/4P 1CT	32	GX24q-3	4P	3000	82	2400	13000	7000	70	PLT32W8304PM
PL-T 32W/835/4P 1CT	32	GX24q-3	4P	3500	82	2400	13000	7000	70	PLT32W8354P
PL-T 32W/840/4P 1CT	32	GX24q-3	4P	4000	82	2400	13000	7000	70	PLT32W8404P
PL-T 32W/850/4P 1CT	32	GX24q-3	4P	4000	82	2400	13000	7000	83	PLT32W8504P
PL-T 42W/827/4P 1CT	42	GX24q-4	4P	2700	82	3200	13000	7000	83	PLT42W8274PM
PL-T 42W/830/4P 1CT	42	GX24q-4	4P	3000	82	3200	13000	7000	83	PLT42W8304P
PL-T 42W/835/4P 1CT	42	GX24q-4	4P	3500	82	3200	13000	7000	83	PLT42W8354P
PL-T 42W/840/4P 1CT	42	GX24q-4	4P	4000	82	3200	13000	7000	83	PLT42W8404PM
PL-T 42W/850/4P 1CT	42	GX24q-4	4P	4000	82	3200	13000	7000	83	PLT42W8504P
PL-T 57W/827/4P 1CT	57	GX24q-5	4P	2700	82	4300	13000	7000	101	PLT57W8274PM
PL-T 57W/830/4P 1CT	57	GX24q-5	4P	3000	82	4300	13000	7000	101	PLT57W8304P
PL-T 57W/835/4P 1CT	57	GX24q-5	4P	3500	82	4300	13000	7000	101	PLT57W8354P
PL-T 57W/840/4P 1CT	57	GX24q-5	4P	4000	82	4300	13000	7000	101	PLT57W8404P
PL-T 57W/850/4P 1CT	57	GX24q-5	4P	4000	82	4300	13000	7000	101	PLT57W8504P